

LST Range

Plus Vertical



Safety

Plus Vertical 3 models

Height: 2110mm

Lengths: 560mm, 660mm & 760mm

Outputs: 1335 to 1862 watts, 4555 to 6353 Btu/hr

Type: K2

CPD

BIM

5

FIVE YEAR
WARRANTY
ON CASING

10

TEN YEAR
WARRANTY
ON EMITTER



For more information call 0844 543 6200 or visit www.stelrad.com

Stelrad
Europe's favourite radiator

Follow us on:  @stelrad  facebook.com/stelradlimited

The Stelrad you know *and so much more...*

Stelrad LST Range Plus Vertical



50 Δt (75/65/20°C)

Casing Height

2110

Casing Length mm	Emitter Height mm	Emitter Length mm	UIN	Heat output Watts	Heat output Btu/hr
560	1800	400	142241	1271	4336
660	1800	500	142242	1588	5418
760	1800	600	142243	1855	6329


Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C if you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer).

LST Plus Vertical installation instructions

All dimensions in mm. Inches in brackets.

Present casing and bottom bracket to the wall and mark drill hole positions.

Fit pipework and valve connections to the radiators.

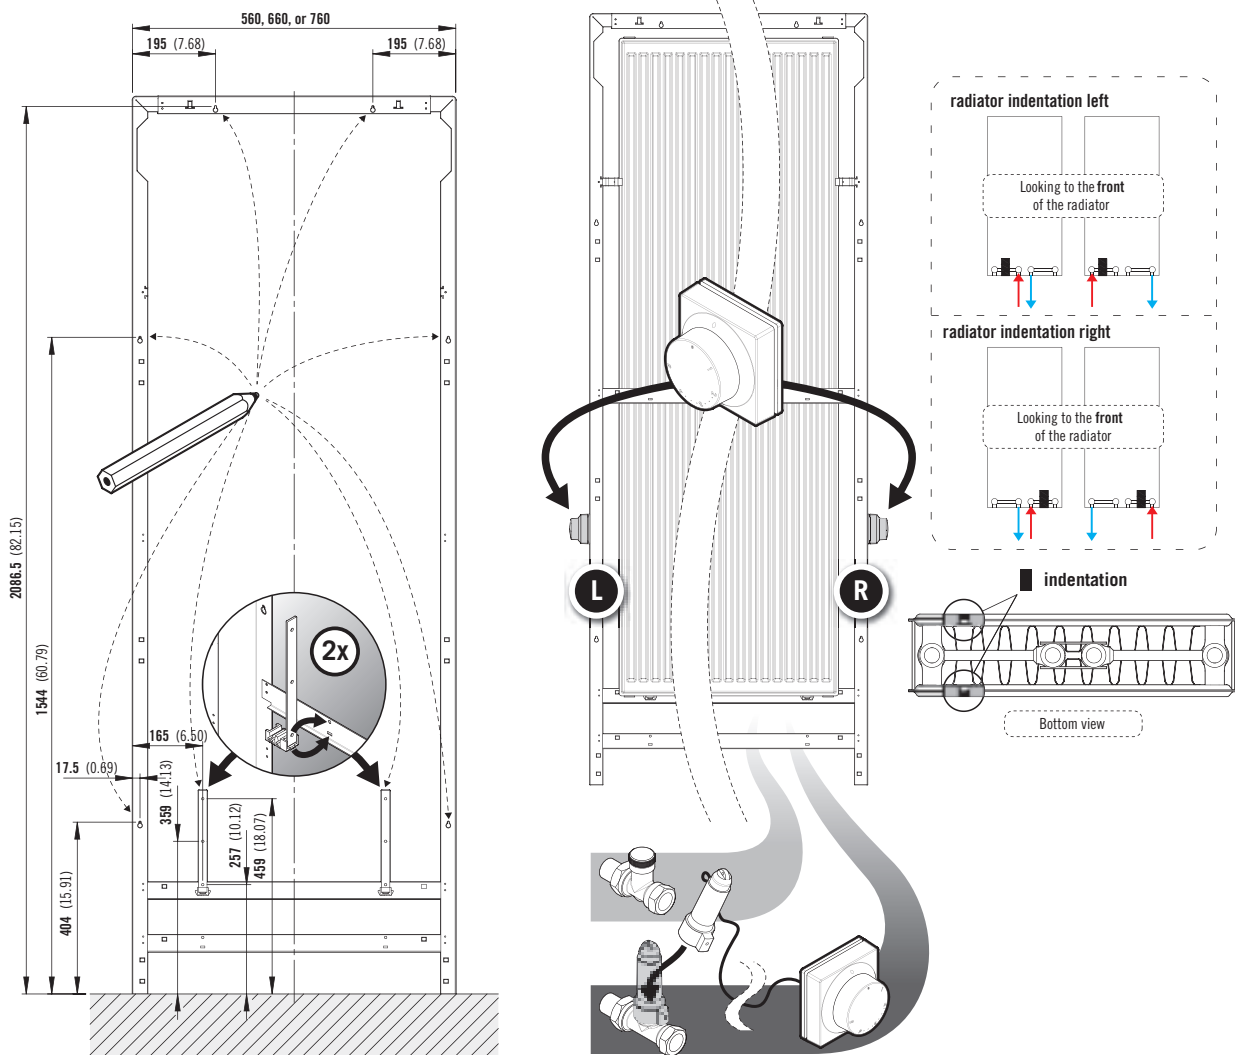

LST Plus Vertical connection options

All dimensions in mm. Inches in brackets.

