

KITCHEN & BATHROOM SERIES



**CALIENTE
RAIL**

50 Δ t

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output	Btu/hr
755	450	407501450	389		1327
	500	407501500	431		1471
	600	407501600	517		1764
	750	407501750	645		2201
1199	450	401101450	615		2098
	500	401101500	675		2303
	600	401101600	794		2709
	750	401101750	972		3316
1791	450	401701450	900		3071
	500	401701500	986		3364
	600	401701600	1158		3951
	750	401701750	1416		4831
2013	450	402001450	1002		3419
	500	402001500	1099		3750
	600	402001600	1294		4415
	750	402001750	1586		5411


STRAIGHT DOUBLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output	Btu/hr
755	450	407502450	565		1928
	500	407502500	626		2136
	600	407502600	749		2556
	750	407502750	934		3187
1199	450	401102450	868		2962
	500	401102500	963		3286
	600	401102600	1154		3937
	750	401102750	1441		4917
1791	450	401702450	1268		4326
	500	401702500	1402		4784
	600	401702600	1670		5698
	750	401702750	2073		7073
2013	450	402002450	1427		4869
	500	402002500	1576		5377
	600	402002600	1874		6394
	750	402002750	2321		7919

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV



UIN	Elements	UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	14531710	CENTRE TAP TRV ANGLED R WHITE -10MM*
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN*
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	14531715	CENTRE TAP TRV ANGLED R WHITE -15MM*
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	14531810	CENTRE TAP TRV ANGLED R CHROME -10MM*
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN*
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	14531815	CENTRE TAP TRV ANGLED R CHROME -15MM*


Available for the Vertical Line Vertical, Flat Vertical, Caliente Rail,* Concord Rail,* Vertical Ultra, Concord Side Concept, Concord Side Chrome, Vertical Line Vertical Concept & Flat Vertical Concept.

*Angled Right Centre Tap TRV's only available for towel rails.




SINGLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

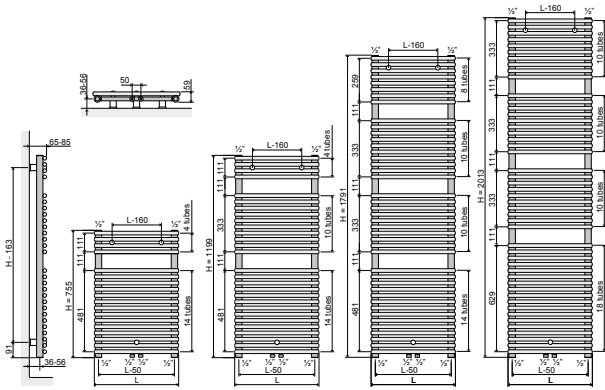

DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

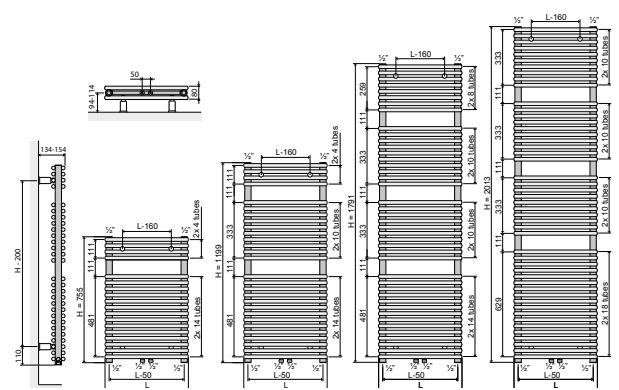


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

Single and Double.

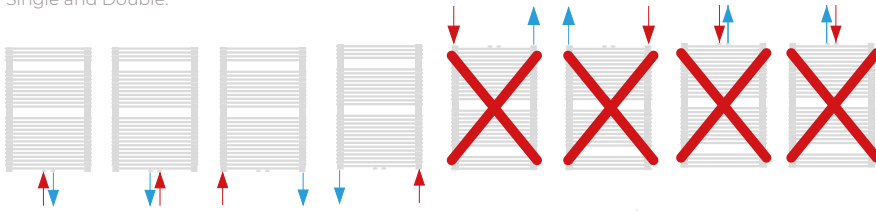

Piping options: BBOE (Bottom, Bottom, Opposite, End)

TAPPING CENTRES



EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

SINGLE

Type																
Tube Quantity	18	18	18	18	28	28	28	28	42	42	42	42	48	48	48	48
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	389	431	517	645	615	675	794	972	900	986	1158	1416	1002	1099	1294	1586
n-coefficients	1.18	1.17	1.15	1.13	1.21	1.20	1.19	1.17	1.24	1.23	1.21	1.17	1.26	1.24	1.21	1.17
Heated surface area (m ² /m)	0.75	0.82	0.94	1.13	1.18	1.28	1.47	1.76	1.77	1.91	2.20	2.64	2.01	2.18	2.51	3.01
Weight (kg/m)	6.80	7.40	8.50	10.20	10.90	11.80	13.50	16.10	17.30	18.60	21.30	25.20	18.90	20.40	23.40	27.80
Water contents (l/m)	3.70	4.00	4.50	5.30	5.90	6.30	7.10	8.30	9.10	9.70	11.00	12.90	10.00	10.70	12.00	14.10

DOUBLE

Type																
Tube Quantity	2x17	2x17	2x17	2x17	2x27	2x27	2x27	2x27	2x41	2x41	2x41	2x41	2x47	2x47	2x47	2x47
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	565	626	749	934	868	963	1154	1441	1269	1402	1670	2073	1427	1576	1874	2321
n-coefficients	1.21	1.21	1.20	1.19	1.23	1.23	1.22	1.21	1.25	1.24	1.23	1.20	1.25	1.24	1.23	1.21
Heated surface area (m ² /m)	1.33	1.45	1.70	2.07	2.07	2.26	2.65	3.23	3.10	3.39	3.97	4.85	3.54	3.87	4.53	5.53
Weight (kg/m)	12.47	13.59	15.82	19.17	19.40	21.14	24.61	29.82	29.15	31.75	36.94	44.72	33.20	36.14	42.01	50.82
Water contents (l/m)	6.62	7.19	8.32	10.02	10.30	11.18	12.95	15.59	15.32	16.62	19.23	23.13	17.60	19.11	22.13	26.65
Km	4.91	5.54	6.86	9.00	6.97	7.87	9.77	12.84	9.54	10.84	13.64	18.38	10.66	12.10	15.21	20.48

NATURAL COLOURS




NT110
Papyrus white




NT120
Pearl white



NT130
Champagne




NT140
Beige



NT150
Beige grey



NT160
Pebble grey




NT170
Quartz grey



SN110
Cream white




SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue




SN170
Black


METALLIC COLOURS




ML110
Dove grey



ML120
Titanium grey



ML140
Granite



ML160
Terra brown



ML170
Graphite black

RAL COLOURS



A1004
Golden yellow



A2003
Pastel orange




A3002
Carmine red




A5002
Ultramarine blue




A6018
Yellow green




A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

To request up to 5 colour samples, please email sales@stelrad.com with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016** Traffic white comes as standard on all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email sales@stelrad.com