

# HOME

SERIES



Compact  
Horizontal  
Line  
Concept

# COMPACT HORIZONTAL LINE CONCEPT

**50 $\Delta$ t**

(75/65/20°C)

**K1**



**K2**



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
<b>600</b>	400	22601104h	348	1187	22602204h	640	2184
	600	22601106h	522	1781	22602206h	961	3279
	700	51601107h	609	2078	51602207h	1121	3825
	800	22601108h	696	2375	22602208h	1281	4371
	900	51601109h	783	2672	51602209h	1441	4917
	1000	22601110h	870	2968	22602210h	1601	5463
	1100	51601111h	957	3265	51602211h	1761	6009
	1200	22601112h	1044	3562	22602212h	1921	6554
	1400	22601114h	1218	4156	22602214h	2241	7646


$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

# COMPACT HORIZONTAL LINE CONCEPT


## WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

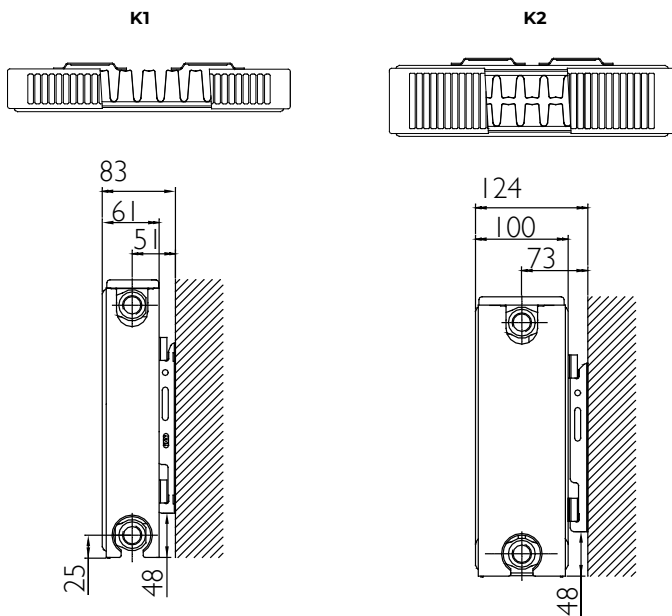

## MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

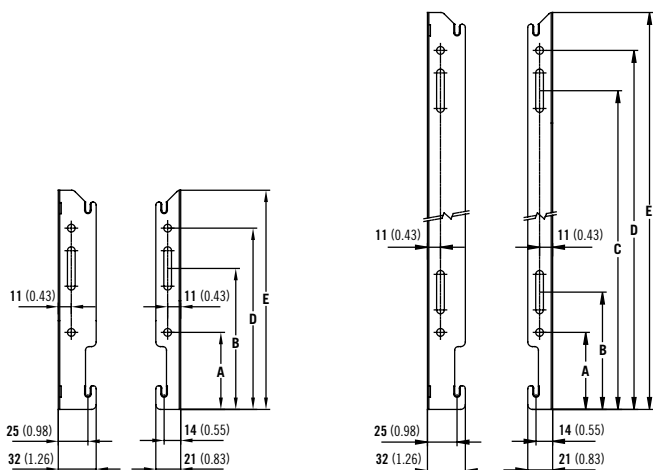


Dimensions	mm	inches
Height	600	23.62
A	65	2.56
B	99	3.90
C	419	16.50
D	453	17.83
E	485	19.09

# COMPACT HORIZONTAL LINE CONCEPT

## K1 & K2 LUG POSITIONS (New as of June 2016).


All dimensions in mm. Inches in brackets.

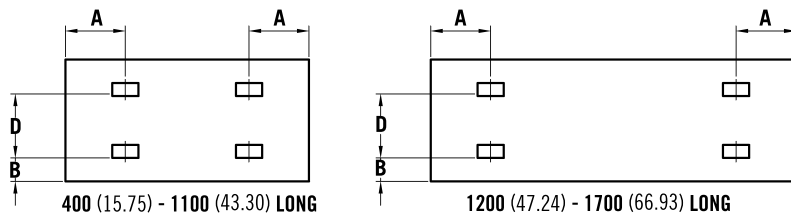

## CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

## PIPING OPTIONS

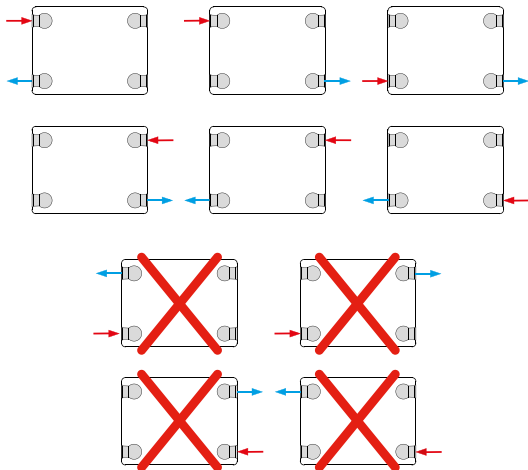


# COMPACT HORIZONTAL LINE CONCEPT

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1	K2
Height	600	600
W/m at 75/65/20	911	1634
n-coefficients	1.28	1.32
Heated surface area (m <sup>2</sup> /m)	4.66	7.74
Weight (kg/m)	24.65	40.00
Water contents (l/m)	3.25	6.60
Wall to tap centre (mm)	51	73

## PRESSURE DROPS

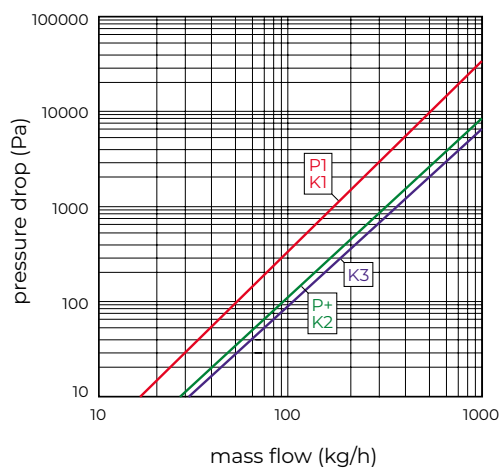

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65