


HUDEVAD

RADIATOR DESIGN

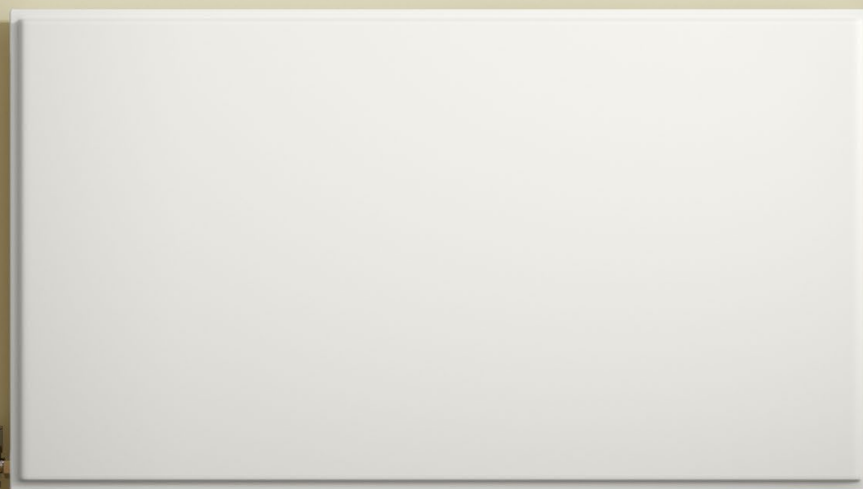

P5 K3

50 Δ t
(75/65/20°C)

K3

Height mm	Length mm	Hudevad UIN	Watts	Heat output Btu/hr	Prod weight (kg)
600	800	H131063308	1630	5562	47.0
	1000	H131063310	1956	6674	58.7
	1200	H131063312	2282	7787	70.4

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Piping connections are the same as the Stelrad Compact.

WALL MOUNTING AND LUG INFORMATION


All dimensions in mm. Inches in brackets.

REAR ELEVATION

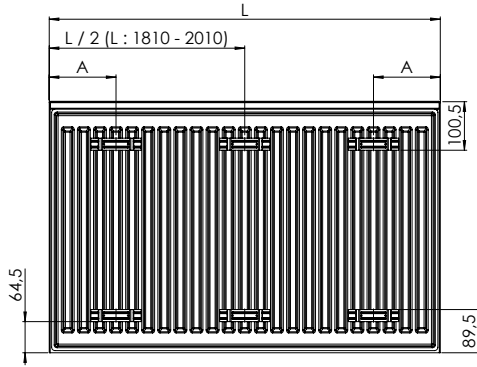

L	A
410-2010	138

SIDE ELEVATION

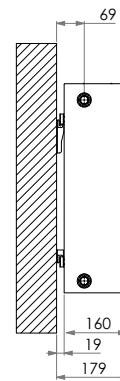

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

PIPING OPTIONS

