

HUDEVAD

RADIATOR DESIGN



P5
VERTICAL

50 Δ t

(75/65/20°C)

K2

Height mm	Length mm	Hudevad UIN	Watts	Heat output Btu/hr	Prod weight (kg)
1800	400	H133218224	1476	5036	49.8
	500	H133218225	1845	6295	62.3
	600	H133218226	2214	7554	74.7


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


P5 VERTICAL

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

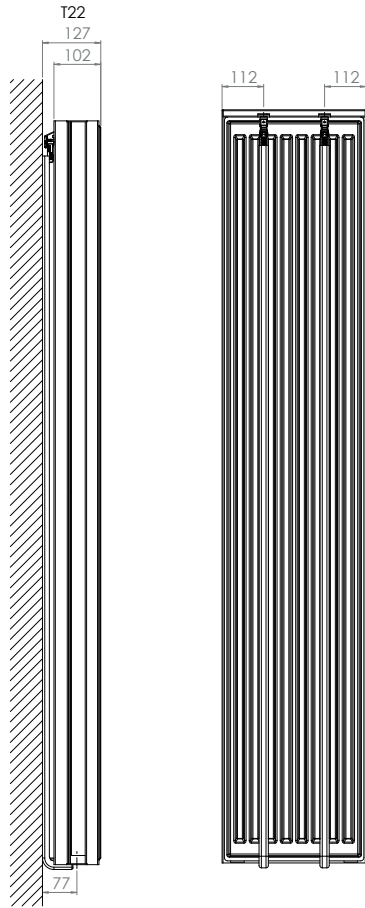

MOUNTING BRACKETS

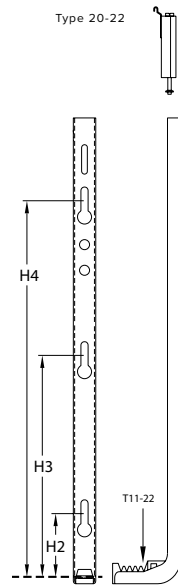

Height in mm	Type 20-22		
	H2	H3	H3
1600	70	2.75	730
1800	70	2.75	830
2000	70	2.75	930

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

